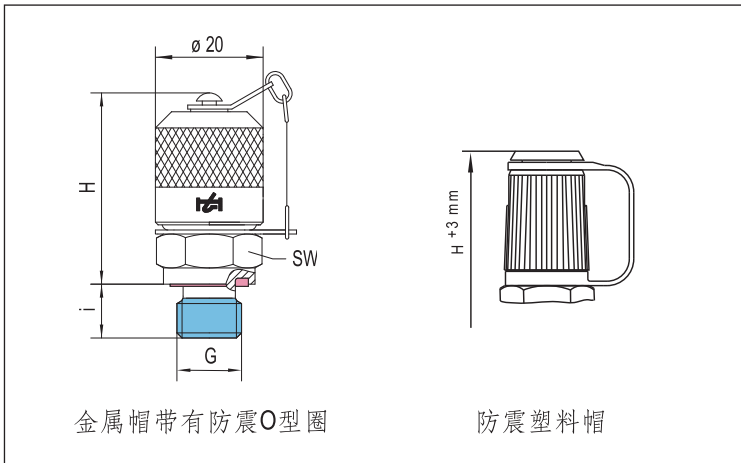






常用测压接头-1620系列 (M16×2)



		扭矩 Nm	技术参数				 材质： 金属帽 易切削钢1.0718 带丁腈橡胶密封	 材质： 塑料帽 易切削钢1.0718 带丁腈橡胶密封	 材质： 金属帽 不锈钢1.4571 带氟橡胶密封
			最大 压力	H mm	i mm	SW mm	订货号	订货号	订货号
螺纹 G	密封类型 A								
M10×1	类型G	12	63MPa	37.5	8.5	17	2103-01-33.00N	2103-30-33.00N	2703-01-33.10
M10×1	类型F	18		37.5	8.5	17	2103-01-12.00N	2103-30-12.00N	请垂询
M12×1.5		30		36	10	17	2103-01-13.00N	2103-30-13.00N	请垂询
M14×1.5		40		36	10	19	2103-01-14.00N	2103-30-14.00N	2703-01-14.10
M16×1.5		60		36	10	22	2103-01-15.00N	2103-30-15.00N	请垂询
G 1/8	类型F	18	40MPa	38	8	17	2103-01-17.00N	2103-30-17.00N	2703-01-17.10
G 1/4		40	63MPa	36	10	19	2103-01-18.00N	2103-30-18.00N	2703-01-18.10
G 3/8		60		36	10	22	2103-01-16.00N	2103-30-16.00N	请垂询
1/8 NPTF	类型H	-	40MPa	33	9.5	17	2103-01-46.00N	2103-30-46.00N	请垂询
1/4 NPTF		-		33	16.5	17	2103-01-47.00N	2103-30-47.00N	2703-01-47.10
7/16-20 UNF	类型E	20	63MPa	37	9	17	2103-01-21.00N	2103-30-21.00N	请垂询
9/16-18 UNF		35		36	10	19	2103-01-53.00N	2103-30-53.00N	请垂询
R 1/8	类型C	-	40MPa	33	13	17	2103-01-40.00N	2103-30-40.00N	请垂询
R 1/4		-	63MPa	33	13	17	2103-01-41.00N	2103-30-41.00N	请垂询